

CYBORFLEX™




SPECIALLY DESIGNED FOR THE APPARATUS
PUMP AREA

IT'S ENGINEERED TO HAVE A VERY TIGHT BEND
RADIUS WITH MINIMUM OVALITY AND A HIGH
WORKING PRESSURE OF 700 PSI

HIGH STRENGTH BRASS COATED WIRE
REINFORCEMENT

MINIMAL ELONGATION UNDER PRESSURE

GREAT FOR HI-PRESSURE FOAM AND
WATER APPLICATIONS WITH STAINLESS
FEMALE JIC COUPLINGS

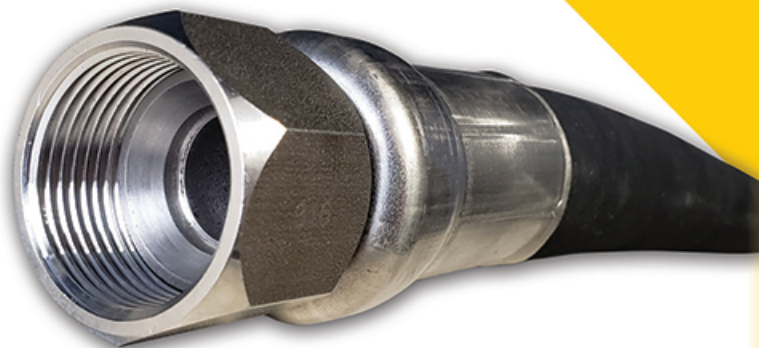

ALL BUT KINK PROOF

<u>Part #</u>	<u>Size</u>	<u>Working Pressure</u>	<u>MIN. Bend Radius</u>
100CF	1"	700 PSI	1.50"
150CF	1-1/2"	700 PSI	2.25"
200CF	2"	700 PSI	2.75"
250CF	2-1/2"	700 PSI	3.25"
300CF	3"	700 PSI	4.25"
400CF	4"	500 PSI	

ALL SIZES AVAILABLE IN 100' LENGTHS

CONTACT US

sales@cyborproducts.com
www.cyborproducts.com

715-533-0553
Cybor Products, Inc.

MADE IN THE USA
a Wisconsin based Corporation